


TAPCO-INTEGRATED BLINKERSIGN®

SPECIFICATIONS

POWER	12VDC or low voltage, current controlled through TAPCO controller
SIGN LEGEND	Various MUTCD options available (W11-2 shown)
SIGN SUBSTRATE	.080" highway grade aluminum
REFLECTIVE SHEETING	3M™ DG3 with anti-graffiti overlay
DIMMING	Variable based on photocell sensor input or 6V solar panel
FLASH PATTERN	Various MUTCD-compliant options dependent upon sign legend
LED TYPE	Environmentally-sealed, high-power 1 watt LED
LED COLOR	Amber, red, white or orange (dependent on sign legend)
LED QUANTITY	Various options dependent upon sign legend
LED LIFE EXPECTANCY	100,000 hours
VISIBILITY	Daytime: more than 1,000 feet Nighttime: more than 1 mile
MOUNTING BRACKETS	Single post standard, double post or z-bar available
OPERATING TEMPERATURE RANGE	-40°F to 122°F (-40°C to 50°C)
DIMENSIONS	Various options dependent upon sign legend



FRONT

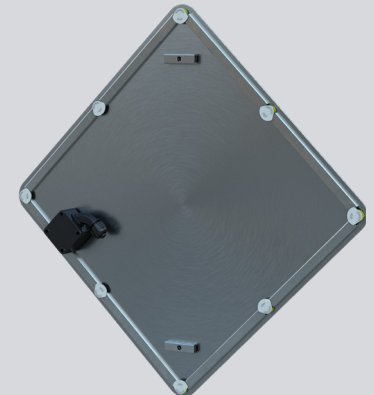

BACK