



CONNECT[®]


MESSAGE BOARDS

VERSATILITY AND CONNECTIVITY FOR MAXIMUM IMPACT.

SMC 2000 FM ST – FULL-MATRIX SOLAR MESSAGE CENTER

The SMC 2000 FM ST meets all the requirements of the MUTCD, while offering unparalleled ease of maintenance and programming. Hill & Smith advanced safety technology builds in optimum control, automation, and work safety features.

It's what you've come to expect from the only manufacturer of transportation safety products that combines Integration + Intelligence to solve problems and increase passenger and worker safety.

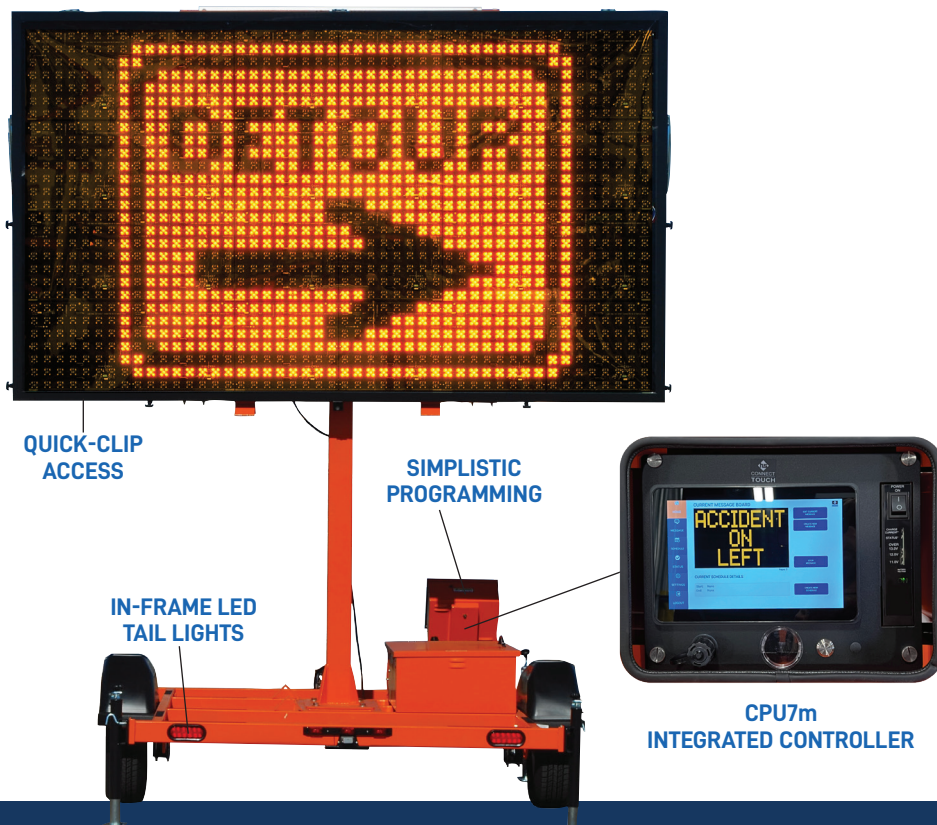

PRODUCT FEATURES

- 5 LEDs per pixel provide uniform light output
- Energy-efficient LED display provides minimal battery maintenance and long operational life
- Automatic intensity control provides optimum LED intensity
- Industrial-grade trailer provides stable platform
- Powder-coated finish for improved fade and scratch resistance
- Calendar programming capability
- Full-matrix display provides graphic messages and arrow board capability
- Durable in-frame LED tail lights
- On-board charger provides option of solar or AC charging
- Quick-clip access for ease of display maintenance
- State-of-the-art charge technology reduces battery overcharge incidents
- Remote programming option available
- On-board dedicated NTCIP-compliant controller provides simplistic programming with secure password protection
- 5-year standard warranty



FULL-MATRIX DESIGN

The continuous, full-matrix design allows the display of messages using text, graphic symbols, or both. Graphic symbols are displayed at a standard 50-inch height and text messages are displayed using either 20" or 28" tall characters.

LED LAMP PIXEL DESIGN

The SMC 2000 FM ST uses 5 high-intensity, solid-state LEDs per 2-inch pixel. This creates a more uniform light output in each pixel, resulting in increased message definition and distance legibility.

STANDARD NTCIP-COMPLIANT CONTROLLER

A user-friendly, NTCIP-compliant, dedicated computer designed by Precision Solar Controls reduces the number of keys required to program the SMC 2000 FM ST.

FULL-MATRIX DISPLAY

The SMC 2000 FM ST provides 250 text, 60 graphic, and 20 arrow board display messages preprogrammed and stored in the controller. Additionally, 100 user-created messages can be programmed and stored.

INDUSTRIAL-GRADE STRUCTURAL STEEL TRAILER

The SMC 2000 FM ST uses a durable trailer system designed to provide years of dependable service. The trailer's high-quality powder-coated finish, 2"x4" 11-gauge steel frame, and a 3,500-pound suspension system enhance the overall quality of the unit.

MODULAR ELECTRONIC COMPONENTRY

The entire system was developed with the operator/end user in mind. Electronic components are easily replaced, reducing downtime and maintenance costs. This modularity also improves system diagnostics.

SMC 2000 FM ST SHOWN
IN TRAVEL POSITION



SMC 2000 FM ST UNIT SPECIFICATIONS

- Raised Height: 163" (4.14 m)
- Travel Height: 104" (2.64 m)
- Width: 96" (2.43 m)
- Length with tongue: 168" (4.26 m)
- Length w/o tongue: 134" (3.4 m)
- Weight: 1,875 lbs (850.5 kg)
- Energy Source: (6) 6-volt deep-cycle batteries
- Generator: solar panel array - 140 Watt
- Operating Temperature Range: -20 to +120° F (-29 to +49° C)
- Lift Mechanism: leak-resistant electro-hydraulic
- Main Frame: 2"x4"x.120" high-grade steel

SIGN SPECIFICATIONS

- Height: 79.5" (2.02 m)
- Width: 133" (3.38 m)
- Character Height: 18" (46 cm)
- Lamp: LED (5 per pixel)
- Legibility: 1,000 ft (304 m)

CONTROLLER SPECIFICATIONS

- Control Console Display: LCD
- Pre-programmed Messages: 250
- User-programmed Messages: 100
- NTCIP-compliant software
- Update Speed: 100 Milliseconds
- Removable solid state design
- Off-the-shelf QWERTY keyboard

HILL & SMITH INC.

987 Buckeye Park Road, Columbus, OH 43207
614-340-6294 | info@hillandsmith.com
hillandsmith.com

©2024 Hill & Smith Inc.

