

AVAILABLE THROUGH

GRAINGER[®]

FOR THE ONES WHO GET IT DONE

GRAINGER.COM[®] | 1.800.GRAINGER

LEGENDVIZ[®] BLINKERSIGN[®]

Shown to increase sign legibility distance by as much as 100 percent compared to standard traffic signs*, LegendViz[®] BlinkerSigns feature highly visible, LED-illuminated legends for improved visibility at night.

- Enhanced sign legibility without retroreflectivity or headlights
- Designed for quick and easy one-person installation
- Perimeter LEDs automatically dim based on ambient light, maintaining optimal LED output
- Legend illuminated from dusk to dawn
- 7+ days of solar autonomy **
- Solar or AC power options for flexible configuration
- MUTCD compliant
- Made in the USA

*According to the results of a closed-course driver trial and statistical analysis conducted by the Texas A&M Transportation Institute (TTI)

** Autonomy depends on installation specifications.



AVAILABLE THROUGH

GRAINGER®

FOR THE ONES WHO GET IT DONE

GRAINGER.COM® | 1.800.GRAINGER

LEGENDVIZ® APPLICATIONS




LOW AMBIENT LIGHT CONDITIONS



PERPENDICULAR OR OFFSET ANGLE



PROBLEMATIC LOCATIONS

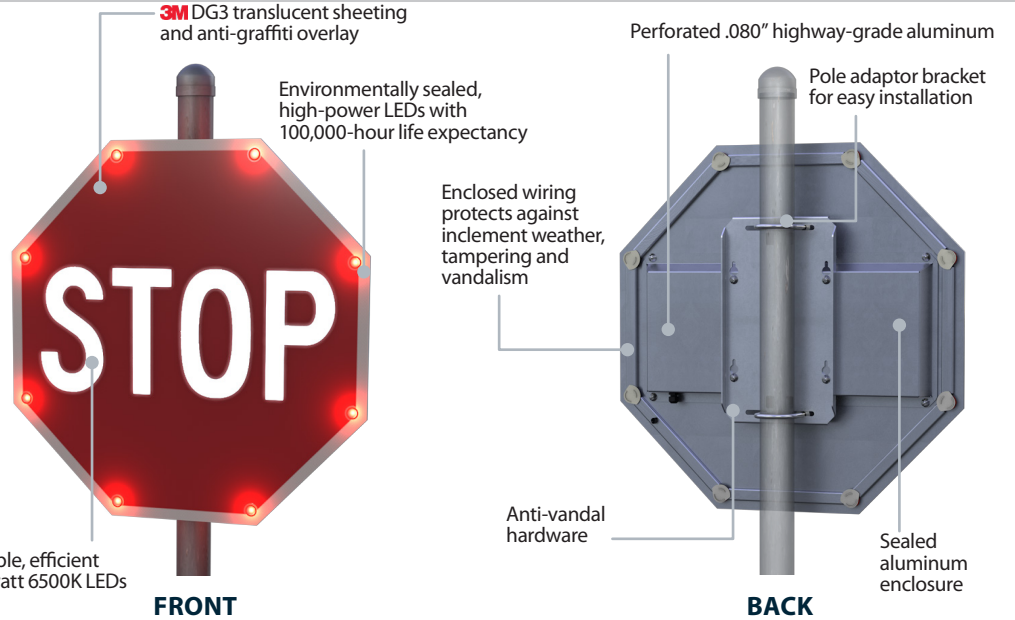

SPECIFICATIONS

| | |
|----------------------------|---|
| POWER | 6VDC - 12VDC or low voltage; current controlled through TAPCO controller |
| ILLUMINATION | Legend: Dusk-to-Dawn or vehicle-activated nighttime illumination Perimeter: 24/7, Dusk-to-Dawn or activated |
| LED COLOR | Legend: White Perimeter: Red |
| LED QUANTITY | Legend: Variable to achieve illumination uniformity Perimeter: 8 LEDs |
| LED LIFE EXPECTANCY | Legend: 50,000 hours Perimeter: 100,000 hours |
| LED VISIBILITY | Legend: Nighttime viewable up to 500 feet and readable up to 300 feet Perimeter: Daytime viewable more than 1,000 feet and nighttime viewable more than 1 mile |
| WIRING PROTECTION | Legend: LEDs protected by sealed aluminum enclosure Perimeter: LEDs protected by enclosed aluminum |
| MOUNTING BRACKETS | Universal mounting brackets included |
| SIGN DIMENSIONS | Stop (R1-1): 30" x 30", 36" x 36" Wrong Way (R5-1a): 42" x 30" (shown) Do Not Enter (R5-1): 30" x 30", 48" x 48" |

* According to the results of a closed-course driver trial and statistical analysis conducted by the Texas A&M Transportation Institute (TTI).