


110W SOLAR PANEL

SPECIFICATIONS

POWER	110W
NOMINAL VOLTAGE	12V
OPEN CIRCUIT VOLTAGE	20.41V
SHORT CIRCUIT CURRENT	6.55A
MAXIMUM POWER VOLTAGE	17.78V
MAXIMUM POWER CURRENT	6.21A
GLASS	Tempered
FRAME	Anodized aluminum
CONSTRUCTION	Silicon cells encapsulated in double-layer EVA with a white polymer backing
WEIGHT	16.6 lbs (7.5 kg)
ENCLOSURE	IP65 Rated
MOUNTING HARDWARE	Various options available
OPERATING TEMPERATURE RANGE	-40° F to 185° F (-40° C to 85° C)
DIMENSIONS	26.34" W x 39.92" H x 1.85" D (669 mm W x 1014 mm H x 47 mm D)

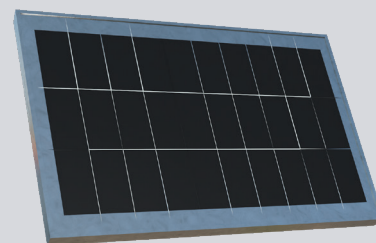


FRONT



BACK

SIDE-OF-POLE BRACKET

MATERIAL	Aluminum
POLE TYPE	3" or larger (4½" shown)
MOUNTING HARDWARE	Banding, U-bolt, or bolt
BRACKET	Single and Dual solar panel configurations available

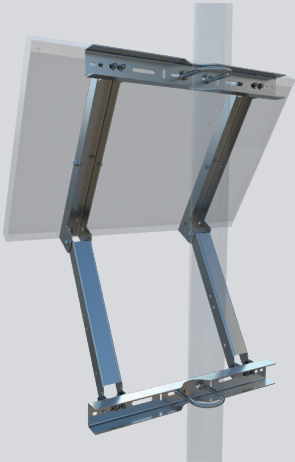

SIDE-OF-POLE SINGLE PANEL BRACKET